

Part number:

HYDROMA

HYDRAULICKÉ SYSTÉMY

**HIDROMA
SYSTEMS**

UKŁADY HYDRAULICZNE



HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

**MASSIMA PRESSIONE, DIRETTE, OTTURATORE DIFFERENZIALE
DIRECT, DIFFERENTIAL PISTON RELIEF**

VSDC-150

05.12.02 - X - Y - Z

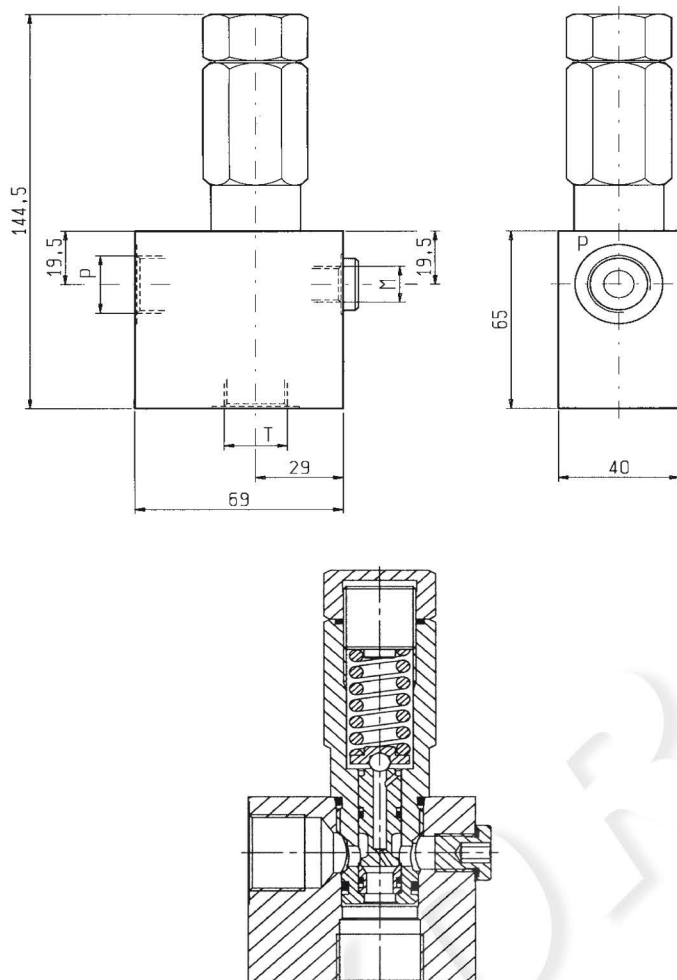


DATI TECNICI / TECHNICAL DATA

Pressione di lavoro max.
Max. working pressure 350 bar

Portata max.
Flow max. 150 l/min

Peso
Weight 0.9 kg

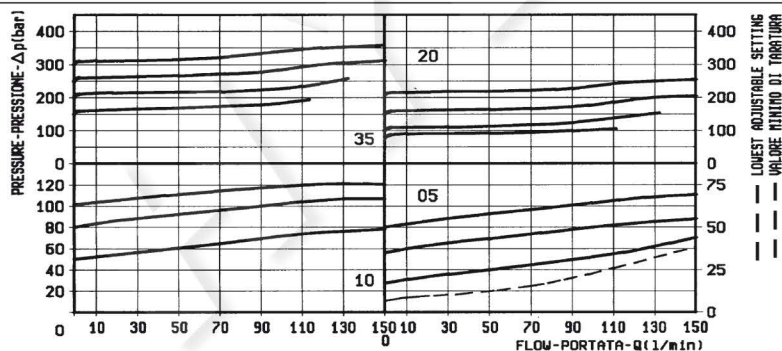

X

**REGOLAZIONI
ADJUSTMENTS**

03

vite interna
esagono incassato
leakproof inner hex.
socket screw



cappello per piombatura
sealing cap
codice / ordering code
03.05.01.001



Z	MOLLE / SPRINGS				
	Campo taratura min - max bar Adj. press. range bar	Incremento press. bar / giro vite Press. increase bar / turn	Taratura standard bar (Q = 5 l/min) Std. setting bar (Q = 5 l/min)	Cod. ordinazione Ordering code	Colore Colour
05	5-50	16	50	03.51.01.150	nero black
10	40-100	33	100	03.51.01.151	blu blue
20	70-210	68	200	03.51.01.152	verde green
35	130-350	105	350	03.51.01.142	giallo yellow

Y

ATTACCHI / PORT SIZE

Y	P-T		M
02	G 1/2		G 1/4
03	G 3/4		G 1/4