

Part number:

006-10602**HYDROMA**

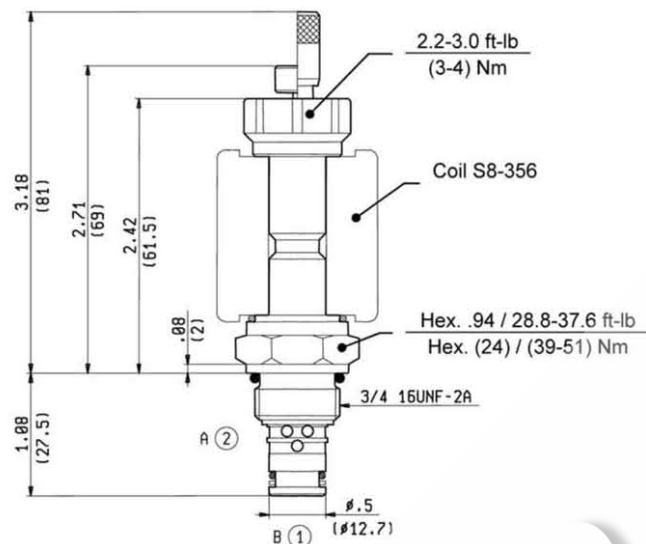

HYDRAULICKÉ SYSTÉMY

**HIDROMA
SISTEMS**

UKŁADY HYDRAULICZNE

HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

**SOLENOID OPERATED VALVES
POPPET 2-WAY NORMALLY OPEN
COMMON CAVITY****VEI-8I-2A-06-NA-S-NSS****SIZE 08****OD.15.06.18 - Y - S0****PATENT PENDING**Inches
(mm)**TECHNICAL DATA**

Maximum Operating Pressure	5000 psi (350 bar)
Rated Flow	8 gpm (30 l/min)
Cavity - Tooling (CA-08A-2N)	page CT.A.001.U
Line bodies	page MN2.A...
Weight	0.286 lbs (0.130 kg)
Fluids - Temperatures	page 7.01.040
Testing Conditions - Seals	page 7.01.040
Internal Leakage	page 7.01.040
Filtration : 25 µm nominal or better	page 7.01.050
Minimum Voltage Required	90% of nominal
Coils must be ordered separately	page 1.71.042
Mounting Position	unrestricted

Rev.02.10

1.12B.050.U

Y**ORDERING OPTIONS****1I**

Standard

**1L**Push Style Manual
Override**1M**Push and Twist Style
Manual Override