

Flow Control Valves

Series SRR



- robust, simple and reliable
- easy coil change without opening the hydraulic envelope
- flow rates are unaffected by temperature change or when the higher load pressure alternates between the outlet ports
- easy to service
- dependable

1 Descriptions

1.1 Generals

The flow control valves of the SRR series are used to set the working speed of hydraulics actuators, the setting being load-independent, and pressure compensated. The flow rate is set by an adjustable slit-type orifice. When used as a 3-way valve, the higher pressure can be either at the A or


the B port. The special orifice design ensures that the flow setting is largely independent of the viscosity of the operating fluid. For a 2-way flow control function please ask Bucher Hydraulics.

1.2 Application examples


- Harvesters
- Sweepers
- Refuse collection vehicles
- Fertiliser spreaders
- Trailered machines
- Mowers
- Road rollers
- Municipal vehicles
- Forestry machines
- Wood chippers

2 Symbols


2.1 2 and 3-way flow control valves

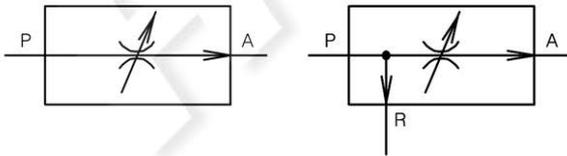


2.2 3-way flow control with pressure relief

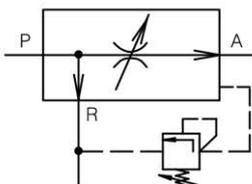

2.3 3-way flow control with bypass check valve

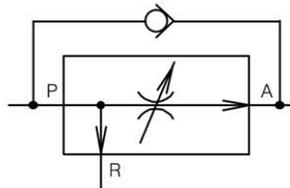

2.4 3-way flow control with pressure relief and bypass CV

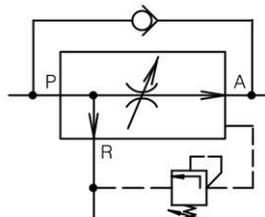

Reference: 100-P-000090-US-08

3 Technical data

General characteristics	Description, value, unit
Design	line mounting
Flow direction	P → A controlled P → R surplus flow discharge (models shown in 2.1 a. 2.3, surplus flow can be press.)
Seals	Viton (FPM)
De-energized position	orifice closed
Mounting attitude	unrestricted; preferably with coil at bottom (auto. air bleed)

Electrical characteristics	Description, value, unit
Design	high pressure; wet armature
Supply voltage	12 or 24 Volt DC from an electronic controller
Power consumption	27.6 Watt at 12 V coil and I _{max.} = 2,3 A 27,6 Watt at 24 V coil and I _{max.} = 1,15 A
Dither frequency required	50 Hz - 150 Hz (observe I _{max.})
Relative duty cycle	100% at I _{max.}
Protection class (with a properly-fitted plug)	DIN plug - IP54; AMP Junior Timer - IP65; Deutsch plug - IP67
Electrical connection	plug-base with pins to DIN 43650; AMP Junior Timer plug connector (2-pole); Deutsch plug DT04-2P-EP04

Hydraulical characteristics	Description, value, unit
Constant flow range in GPM _(US)	2.6, 4.2, 6.6, 8.5, 10.6, 13.2, 16.6, 21.1 ¹⁾
Constant flow range in l/min	10, 16, 25, 32, 40, 50, 63, 80 ¹⁾
Inlet flow	max. 26.42 GPM _(US) (100 l/min) ¹⁾
Operating pressure	max. 4500 PSI (315 bar) ²⁾
Leakage	max. 6.1 in ³ /min at 1450 PSI (100 cm ³ /min at 100 bar) ¹⁾
Min. pressure difference (pressure compensator)	100 PSI (7 bar)
Control accuracy (as a % of the nominal flow): Load-dependency when under pressure Hysteresis when operated	max ±2,5 % ³⁾ max ±3,5 % ³⁾
Fluids	mineral oil to DIN 51524 and DIN 51525 ⁴⁾
Fluid temperature range	-5 °F to +175 °F
Viscosity range	50 to 1500 S.U.S (10 to 300 mm ² /sec.
Max. admissible level of contamination of the hydraulic fluid	NAS 1638 class 9, ISO 4406 class 20/18/15 (see section 11)

1) Values refer to an oil viscosity of 175 S.U.S.


2) For higher pressures, consult Bucher Hydraulics

3) Values refer to the selected flow range.

4) for other fluids, consult Bucher Hydraulics.


4 Performance graphs

4.1 Q / I characteristics

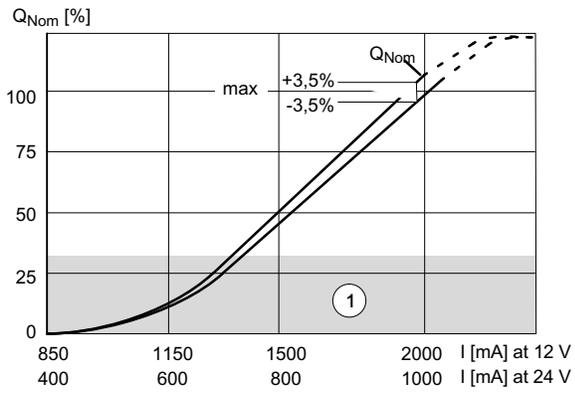


1	fine control range
2	Q_A - constant flow pressurised

4.2 Variation in flow

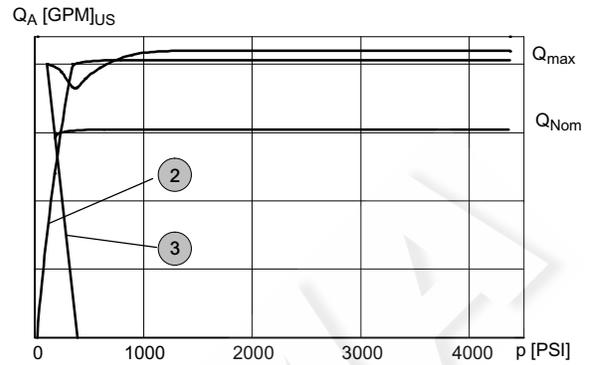

3	Q_A - surplus flow pressurised
---	----------------------------------


4.3 Pressure drop during vented bypass P → R

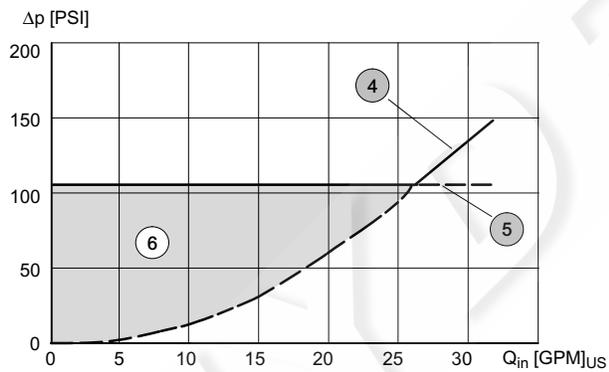

4	Control valve throttling curve
5	Control - Δp - characteristic 100 PSI

6	Pressure loss area (the actual pressure-loss characteristic is dependent on the tank pressure at port R)
---	--

5 Dimensions in inches (mm)

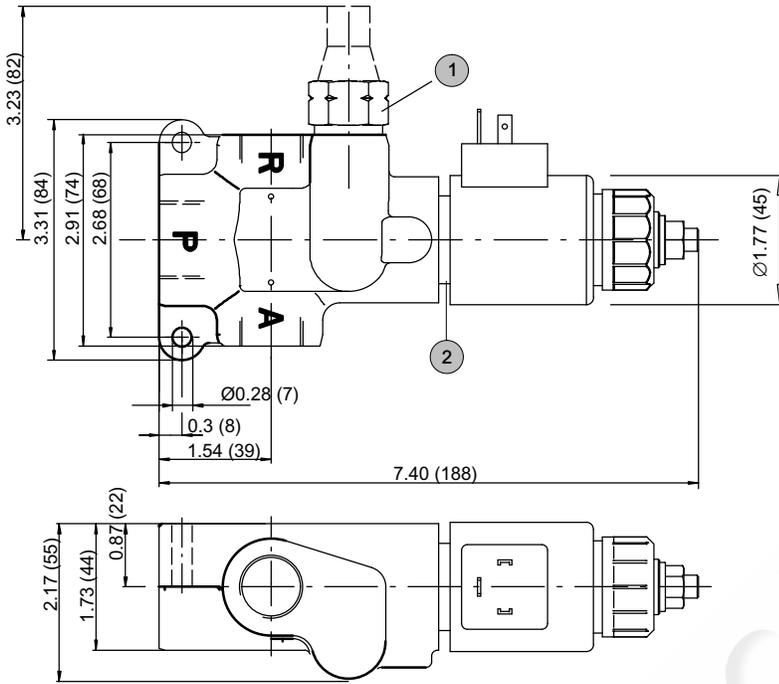

Port threads P = M27x2 or G3/4"
 A and R = M22x1.5 or G1/2"

1 Model with pressure relief

2 $M_A = 30^{+5}$ Nm


6 Models

6.1 Manual overrides

Emergency pin, SRC....S..




IMPORTANT : By pressing the emergency pin you operate the valve ON/OFF

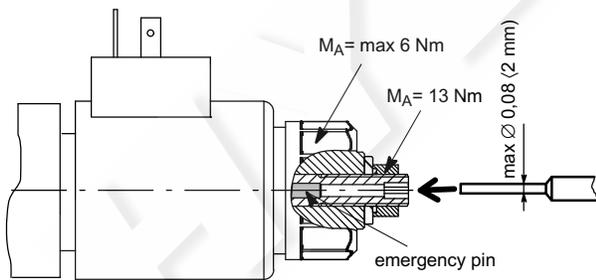


Basic manual override, SRC....N..

Q_0 to Q_{max} . = approx. 3,5 turns at the rotary knob



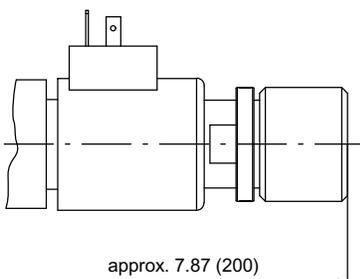


Basic manual override, SRC....T..

Q_0 to Q_{max} . = approx. one turn at the rotary knob

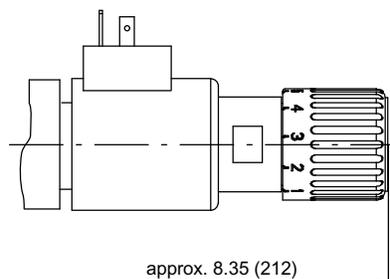

6.2 Plug bases

GDM plug to DIN 43650 -G..-	AMP Junior Timer -J..-	Deutsch plug DT04-2P-EP04 -T..-
		


7 Ordering code

	S	R	R	B	0	5	0	S	3	M	-	0	G	1	2	-	R	P	/		P=
Flow control valve																					
Pipe mounting																					
Size																					
Constant flow range (2.6, 4.2, 6.6, 8.5, 10.6, 13.2, 16.6, 21.1 GPM _[US]) e.g. 0...13.2 GPM _[US] (0...50 l/min) = 050 ⁷⁾																					
Type of operation solenoid + emergency piin = S solenoid + basic manual override = N solenoid + deluxe manual override = T																					
3-way = 3 2-way (for this function please ask Bucher Hydraulics) = 2																					
Port threads P: M27x2 / A+R = M22x1.5 = M P: G3/4" / A+R = G1/2" = G P, A + R: 7/8"-14UNF = U (Adapters for pressure port P can be ordered separately, see section 8)																					
Design number (to be inserted by the factory)																					
Plug connector GDM plug (DIN) = G AMP Junior Timer = J Deutsch plug = T																					
Proportional solenoid supply voltage DC 12 Volt = 12 DC 24 Volt = 24																					
Bypass check valve A to P without = R with = *																					
Pressure relief function (surplus flow cannot be pressurised) without = P (Specify the pressure setting in plain text) with = *																					
Options (to be inserted by the factory)																					

7) Constant flow range e.g. 2.6 GPM = 010, 4.2 GPM = 016, 6.6 GPM = 025, 8.5 GPM = 032, 10.6 GPM = 040, 13.2 GPM = 050, 16.6 GPM = 063, 21.1 GPM = 080 (for other flow ranges, contact Bucher Hydraulics)

8 Accessories

8.1 Adapter

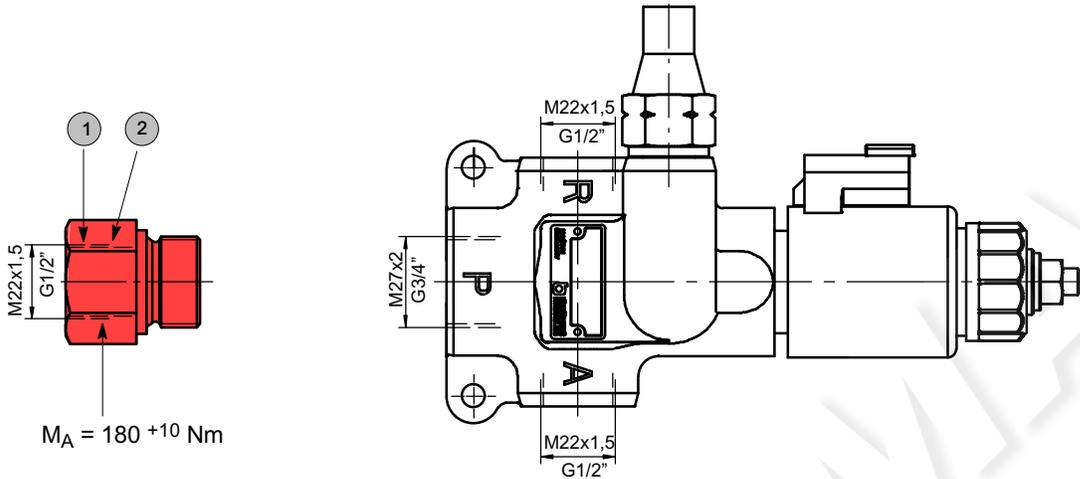

1	adapter M27x2 → M22x1,5
2	adapter G 3/4" → G 1/2"

Model	Description	Part number
Adapter M27x2 → M22x1,5	Adapter with cutting edge	100000183
Adapter G 3/4" → G 1/2"	Adapter with sealing ring profiled sealing ring to DIN 3869 is included with delivery	100235660

8.2 Electronics

For controlling SR... flow control valves, we recommend the E.SK 103 and E.SK 106 series of control units and plug-in cards. These are used to control 1 or 2 proportional solenoids and can also operate on/off solenoids and other auxiliary

functions. Plug-in cards are available, and control units can be supplied that are supplied. The following table contains a small selection of the extensive range of accessories and electronics from Bucher Hydraulics.

Model	Description	Part number
ELSK106-91***	with screw terminals	100018790
ELSK106-81***	with screw terminals, encapsulated	100018791
ELSK106-81***/02	with screw terminals, encapsulated, with ramp 2s	100013454
ELSK106-81***/04	with screw terminals, encapsulated, with ramp 4s	100026079
Junior Timer 2Pol	plug, AMP J, with 2 m cable	100152575

9 Installation information



IMPORTANT!

When mounting the valve, ensure that the body is not subjected to any distorting forces. If necessary use shims to equalise the level of the mounting points. Do not use any pipe fittings with tapered-threads!



To ensure reliable operation, M27x2 or G3/4" fittings with threaded stud ends (length of stud end 16 mm) must be used.

If required, adapters for M27x2 to M22x1,5 or G 3/4" to G 1/2" can be supplied (see section 8).

Bleed all air from the system (if possible, operate the flow control valve several times at no-load)

10 Fluid

The oil for SRR.. products must have a minimum cleanliness level of 20/18/15 to ISO 4406 or class 9 to NAS 1638.

11 Fluid cleanliness

Cleanliness class (RK) onto ISO 4406 and NAS 1638

Code ISO 4406	Dirt particle number / 100 ml			
	≤ 4 µm	≤ 6 µm	≤ 14 µm	NAS 1638
23/21/18	8000000	2000000	250000	12
22/20/18	4000000	1000000	250000	-
22/20/17	4000000	1000000	130000	11
22/20/16	4000000	1000000	64000	-
21/19/16	2000000	500000	64000	10
20/18/15	1000000	250000	32000	9
19/17/14	500000	130000	16000	8
18/16/13	250000	64000	8000	7
17/15/12	130000	32000	4000	6
16/14/12	64000	16000	4000	-
16/14/11	64000	16000	2000	5
15/13/10	32000	8000	1000	4
14/12/9	16000	4000	500	3
13/11/8	8000	2000	250	2

12 Specification sheet

Flow control valve, series SRR

Order Enquiry

Company:	<input type="text"/>	Customer No.	<input type="text"/>
Address:	<input type="text"/>	Phone number:	<input type="text"/>
Code/Location:	<input type="text"/>	Fax number:	<input type="text"/>
Country:	<input type="text"/>	E-mail address:	<input type="text"/>

Ordering code (see Sect. 7)

	Pressure setting	Quantity
SRRB <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> - 0 <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/>	<input type="text"/> PSI	<input type="text"/>
SRRB <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> - 0 <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/>	<input type="text"/> PSI	<input type="text"/>
SRRB <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> - 0 <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/>	<input type="text"/> PSI	<input type="text"/>
SRRB <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> - 0 <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/>	<input type="text"/> PSI	<input type="text"/>

12.1 Details of the Application

Operating pressure [PSI]:	<input type="text"/>	Max. intermittent pressure [PSI]:	<input type="text"/>
Inlet flow [GPM]:	<input type="text"/>	Controlled flow rate [GPM]:	<input type="text"/>
Fluids:	<input type="checkbox"/> Mineral oil	<input type="checkbox"/> Biodegradable oil	<input type="checkbox"/> Other <input type="text"/>
	<input type="checkbox"/> HFA	<input type="checkbox"/> HFC	<input type="checkbox"/> HFD
Fluid temperature range [°F]:	<input type="text"/>	Viscosity range S.U.S:	<input type="text"/>
Supply system:	<input type="checkbox"/> Fixed-disp. pump	<input type="checkbox"/> Constant-pressure pump	
	<input type="checkbox"/> Var.-disp. pump, LS	<input type="checkbox"/> Variable-displacement pump, power-limited	

Name

Date

Signature