

Part number:

006-10744

HYDROMA

HYDRAULICKÉ SYSTÉMY

**HIDROMA
SYSTEMS**

UKŁADY HYDRAULICZNE



HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

UNIDIREZIONALI, SBLOCCAGGIO OLEODINAMICO, SEMPLICE
EFFETTO, FLANGIABILI, RUBINETTO
FLANGEABLE, PILOT OPERATED CHECK WITH MANUAL SHUT-OFF


VSO-SE-FCV-DL-S

05.52 - K - X - Y - Z

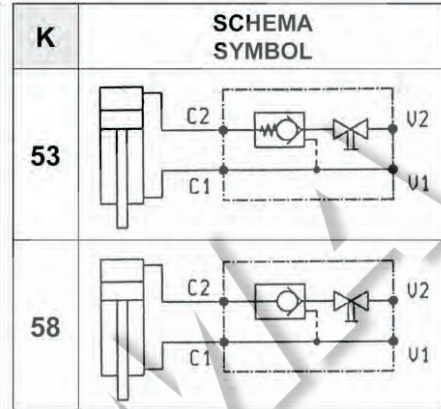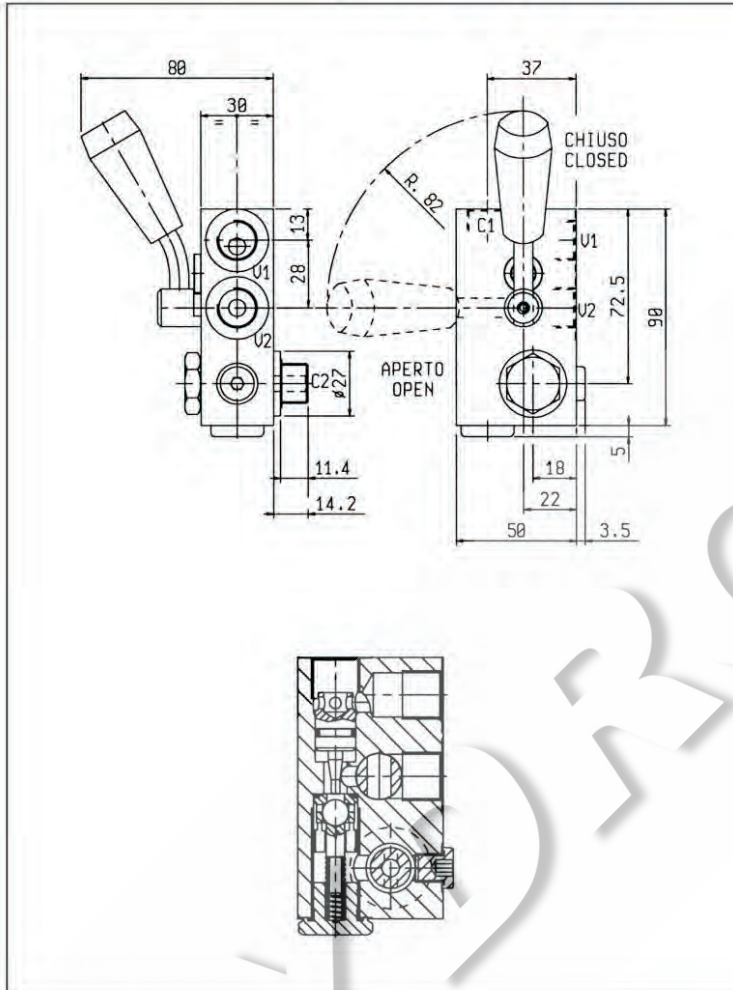

DATI TECNICI / TECHNICAL DATA

Coppia di serraggio Installation torque	50-55 Nm
Pressione di lavoro max. Max. working pressure	350 bar
Portata max. Flow max.	30 l/min
Rapporto di pilotaggio Pilot ratio	5.4 : 1
Peso Weight	0.60 kg

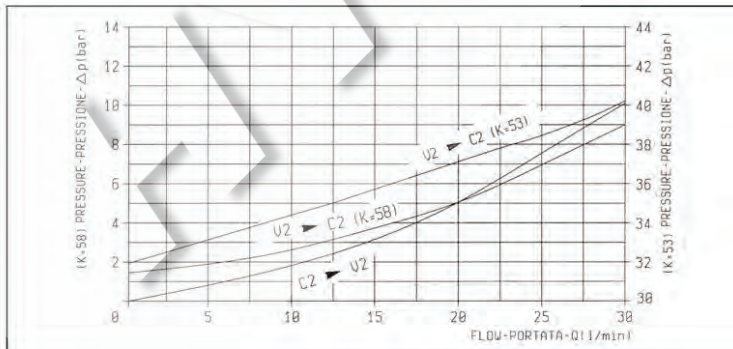

X GUARNIZIONE SUL PISTONE DI PILOTAGGIO
O-RING ON PILOT PISTON

10 con guarnizione
with o-ring

Z MOLLE / SPRINGS

Inizio apertura (bar) Cracking pressure (bar)	Cod. ordinazione Ordering code
00 (K = 58) 1.6	03.51.01.107
00 (K = 53) 32	03.51.01.309

Y ATTACCHI / PORT SIZE
V1 - V2 - C1 - C2

02 G 3/8