

Part number:

HYDROMA



HYDRAULICKÉ SYSTÉMY

**HIDROMA
SYSTEMS**

UKŁADY HYDRAULICZNE

HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

**CHECK, POPPET TYPE
SUN CAVITY INTERCHANGE****VUCN-08U****T-13A****04.31.23.00.20 - Z****TECHNICAL DATA**

Max. pressure: 5000 psi (350 bar)

Max. flow: 21 gpm (80 l/min)

Cavity : SUN T-13A

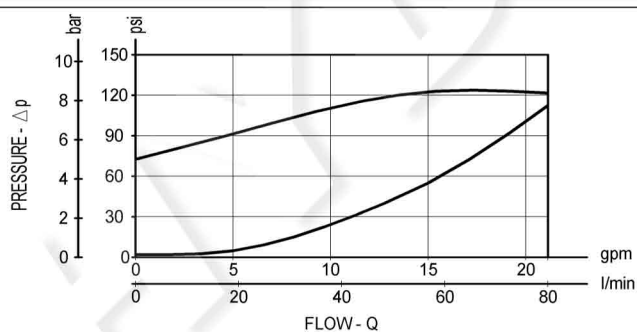
External seal kit : see page A11.211

Installation torque : 30-37 ft-lb (40-50 Nm)

Weight: 0.265 lbs (0.120 Kg)

Inches
(mm)

When pressure at 1 rises above the spring bias pressure, the poppet is lifted and flow allowed from 1 to 2. The valve is closed (checked) from 2 to 1. Precision machining and hardening processes allow virtually leak-free performance in the checked condition.



Z	SPRINGS				
	Cracking pressure psi (bar)				
00	7 (0.5)				
05	75 (5)				