

Part number:

006-10333

HYDROMA

HYDRAULICKÉ SYSTÉMY

**HIDROMA
SYSTEMS**

UKŁADY HYDRAULICZNE

HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ


**SOLENOID OPERATED VALVES
POPPET 2-WAY NORMALLY CLOSED
COMMON CAVITY**

VEI-8I-2A-06-NC-S-NSS


SIZE 08

OD.15.05.18 - Y - S0

PATENT PENDING


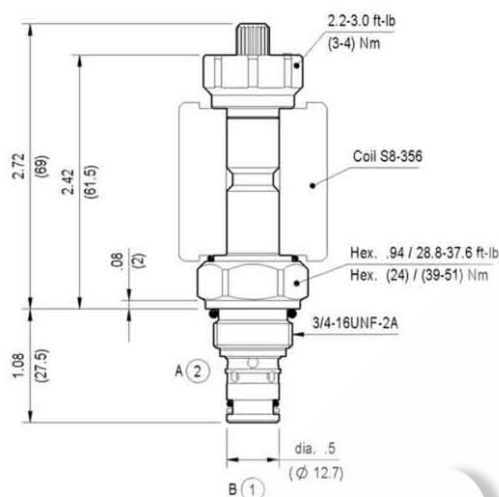


Inches
(mm)



TECHNICAL DATA

Maximum Operating Pressure	5000 psi (350 bar)
Rated Flow	8 gpm (30 l/min)
Cavity - Tooling (CA-08A-2N)	page CT.A.001.U
Line bodies	page MN2.A...
Weight	0.286 lbs (0.130 kg)
Fluids - Temperatures	page 7.01.040
Testing Conditions - Seals	page 7.01.040
Internal Leakage	page 7.01.040
Filtration : 25 µm nominal or better	page 7.01.050
Minimum Voltage Required	90% of nominal
Coils must be ordered separately	page 1.71.042
Mounting Position	unrestricted

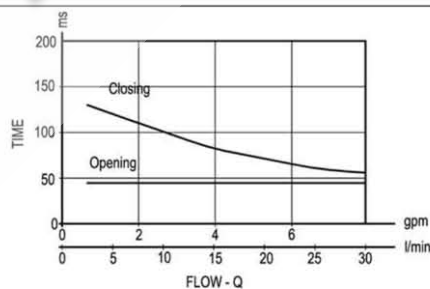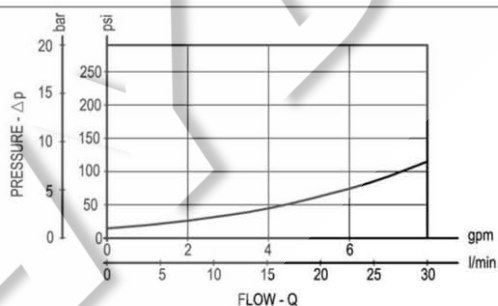


Rev.01.07

Y ORDERING OPTIONS

3I Standard



3M Knob Style Manual Override



1.11B.050.U