

Part number:



**HYDROMA**  
HYDRAULICKÉ SYSTÉMY

**HIDROMA**  
SYSTEMS  
UKŁADY HYDRAULICZNE

**HYDROMA**  
ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ



# PRM5

## PILOT OPERATED PRESSURE RELIEF VALVE


### SERIES 10

#### MODULAR VERSION ISO 4401-05


**p** max 350 bar  
**Q** max 120 l/min

#### MOUNTING SURFACE

ISO 4401-05-04-0-05  
CETOP 4.2-4-05-350

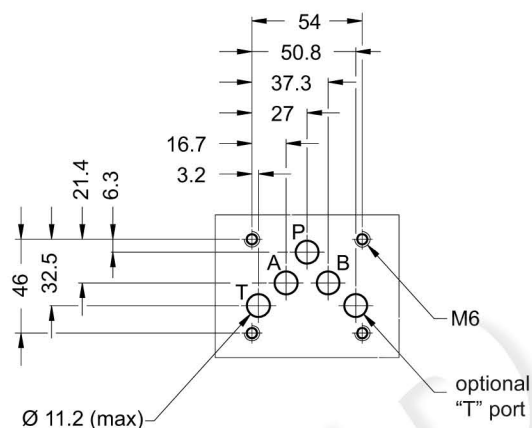

#### OPERATING PRINCIPLE

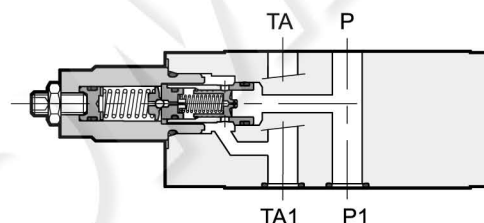


- The PRM5 valve is a pilot operated pressure relief valve made as a modular version, with mounting surface according to ISO 4401 standards.
- It can be assembled with all ISO 4401-05 modular valves without the use of pipes, using suitable tie-rods or bolts.
- Versions are available for single adjustment on one control line, or dual on two control lines and with four different pressure adjustment ranges.
- This valve is used as a hydraulic circuit pressure limiting device.
- It is supplied with an hexagonal head adjustment screw and locking nut. It is also available with knob.

#### PERFORMANCES (measured with mineral oil of viscosity 36cSt at 50°C)

|                                        |                                           |                            |
|----------------------------------------|-------------------------------------------|----------------------------|
| Maximum operating pressure             | bar                                       | 350                        |
| Minimum controlled pressure            | bar                                       | see $\Delta p$ - Q diagram |
| Max flow                               | l/min                                     | 120                        |
| Ambient temperature range              | °C                                        | -20 / +60                  |
| Fluid temperature range                | °C                                        | -20 / +80                  |
| Fluid viscosity range                  | cSt                                       | 10 ÷ 400                   |
| Fluid contamination degree             | According to ISO 4406:1999 class 20/18/15 |                            |
| Recommended viscosity                  | cSt                                       | 25                         |
| Mass: PRM5-PT, -AT, -BT<br>PRM5-DT, -D | kg                                        | 2,8<br>3                   |

#### HYDRAULIC SYMBOLS

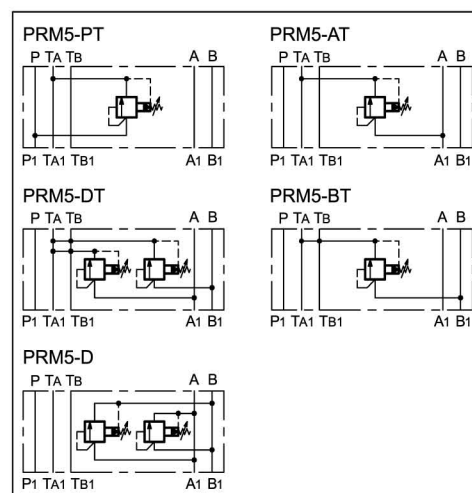

### 1 - IDENTIFICATION CODE

|          |          |          |          |          |  |             |          |  |
|----------|----------|----------|----------|----------|--|-------------|----------|--|
| <b>P</b> | <b>R</b> | <b>M</b> | <b>5</b> | <b>-</b> |  | <b>/ 10</b> | <b>/</b> |  |
|----------|----------|----------|----------|----------|--|-------------|----------|--|

Pilot operated pressure relief valve

Modular version

ISO 4401-05 size

Option: W7 surface treatment. Omit if not required (**NOTE**)

Option: **K** = Adjustment knob. Omit for adjustment with hex socket screw (**standard**)

Seals:  
**N** = NBR seals for mineral oils (**standard**)  
**V** = FPM seals for special fluids

Series No. (the overall and mounting dimensions remain unchanged from 10 to 19)

NOTE: Upon request we can supply these valves completely with zinc-nickel surface treatment on the body. Add the suffix **/W7** at the end of the identification code.



Pressure adjustment range:

|                                         |                                         |
|-----------------------------------------|-----------------------------------------|
| <b>070</b> = 14 ÷ 70 bar (17 bar/turn)  | <b>210</b> = 14 ÷ 210 bar (47 bar/turn) |
| <b>140</b> = 14 ÷ 140 bar (32 bar/turn) | <b>350</b> = 14 ÷ 350 bar (78 bar/turn) |

Versions:

**PT**: single on line P with discharge in TA  
**AT**: single on line A with discharge in TA  
**BT**: single on line B with discharge in TA and TB  
**DT**: double on lines A-B with discharge in TA and TB  
**D**: double on lines A-B with cross discharge

### 2 - CHARACTERISTIC CURVES (values obtained with viscosity of 36 cSt at 50°C)

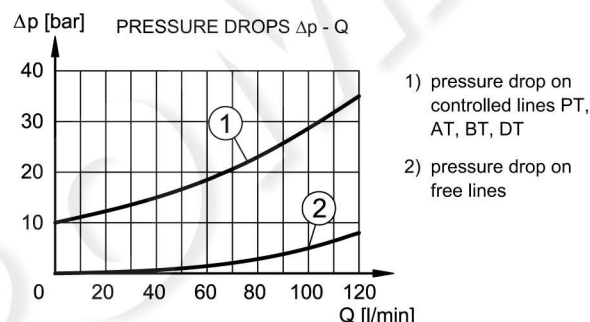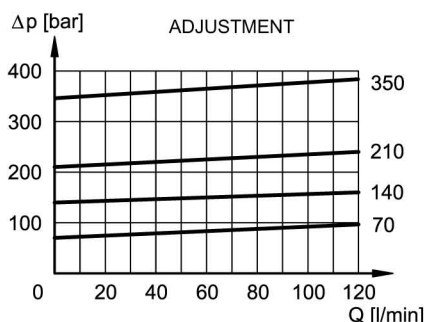

### 3 - HYDRAULIC FLUIDS

Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals (code N). For fluids HFDR type (phosphate esters) use FPM seals (code V). For the use of other kinds of fluid such as HFA, HFB, HFC, please consult our technical department. Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics. The fluid must be preserved in its physical and chemical characteristics.

### 4 - OVERALL AND MOUNTING DIMENSIONS

