SVS valve form A 18mm field-wireable Replaced Art.-No. 3129260

Form A (18 mm)
24...230 V AC/DC
LED and bridge rectifier
metric

Image




Vicarious picture


Form	
	29521
Technical Data	
Operating voltage	24...230 V AC/DC
Operating current per contact	max. 1.5 A
Connection cross section	4 mm² single core, with ferrule end 1.5 mm²
Sealing range (cable diameter)	5...10 mm
Locking of ports	M3 (recommended torque 0.4 Nm)
Compression gland	M16 × 1.5 mm
Protection	IP65 inserted and tightened (EN 60529), with gland
Temperature range	-20...+60 °C
Commercial data	
Net weight	34
Weight unit	Gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Minimum order quantity (piece)	1
Comments	
	Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 04/14


Contact layout

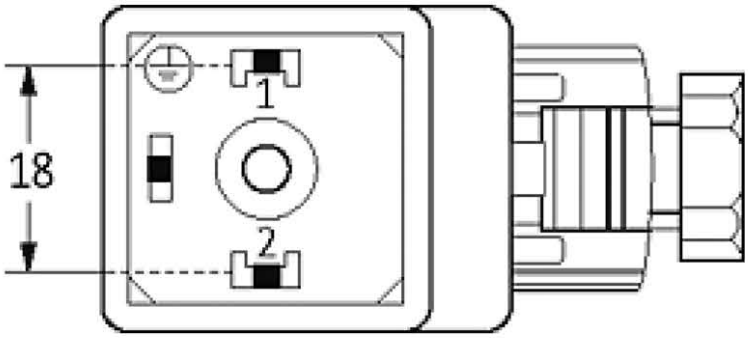

Circuit diagram

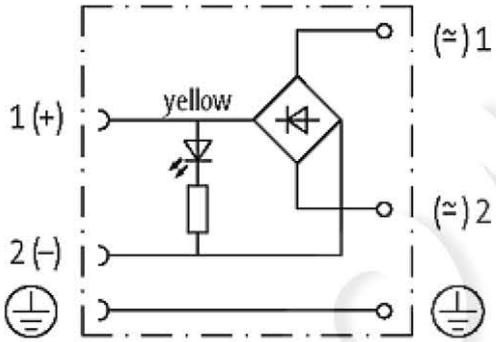

Dimension drawing

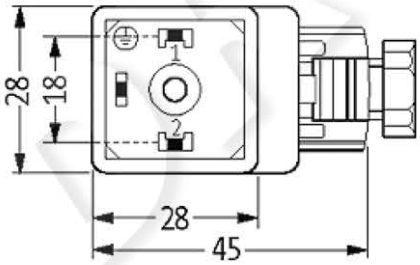

Height: 41 mm

All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 04/14