

Part number:

**HYDROMA**

HYDRAULICKÉ SYSTÉMY

**HIDROMA**  
SISTEMS



UKŁADY HYDRAULICZNE

**HYDROMA**


ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

MODEL  
**770624**

24 VDC coil with AMP Junior Timer connector



DC COIL

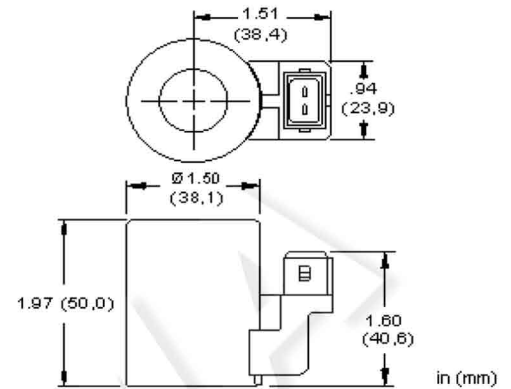

### TECHNICAL DATA

Maximum Coil Temperature at 68°F (20°C) Ambient	218°F (105°C)
Arc Suppression	Standard
Power Consumption (cold) - at rated voltage	22 watts
Maximum Ambient Temperature	122 °F
Voltage/Frequency	24 VDC
Operating Voltage Range	+/- 10% nominal
Duty cycle Rating	100 %
Connector	AMP Junior Timer
Connector Environment Rating	IP67
Solenoid Tube Diameter	.75 in.
Coil Nut Torque	4.5 lbf in.
Model Weight	0.53 lb.

### PROPORTIONAL PERFORMANCE DATA

Maximum Current	590 mA
Nominal Coil Resistance at 122°F (50°C) Stabilized	37.2 ±5% ohms
Nominal Coil Resistance at 68°F (20°C) Cold	26.2 ±5% ohms

### USED WITH

DAAL	DAALS	DBAL	DBALS	DFCA	DFCB	DFDA	DFDB	DFEA	DFEB
DFFA	DFFB	DLDA	DLDAS	DLDZ	DMDA	DMDAS	DMDAZ	DNCA	DNCAZ
DNDA	DNDAS	DNDC	DNDY	DNDYS	DTCA	DTCAZ	DTDA	DTDAS	DWDA
FMDA	FMDB	FPCC	FPCH	FPFK	FPHK	HDDA	PRDL	PRDM	PRDN
PRDP	PSDL	PSDP	RBAN	RBAP					

## TECHNICAL FEATURES

- Coil windings utilize Class N, (392° F [200 °C] rated) magnet wire.
- A TVS surge suppression diode is built into DC coils. Nominal breakdown voltage: 68V. Model code 1.5 KE68CA Steady state power dissipation @ 75°C is 6.5 W and peak pulse dissipation is 1500 W for 1 ms, nonrepetitive.
- Power cable with mating connector is required and is not included with product.
- The coil is magnetically symmetrical and can be mounted in either direction on the solenoid tube without affecting performance.
- For optimum proportional performance, an amplifier with current sensing and adjustable dither should be used. Dither should be adjustable between 100 - 250 Hz.
- IP rating is dependent on the coil connector and the mating connector used.
- RoHS compliant. Restricted materials less than 0.1% total by weight.
- The external steel shell is zinc plated with black dichromate.